

BAND SAWING MACHINE

HKA-400

◆ FEATURES

■ Rigid Double Post

- Allows minimal guide arm span for maximum beam strength providing longer blade life and faster cutting rates.
- Allows for consistent feeding throughout the cut with 8° head angle.
- Allows for minimal blade size and maximum capacity.



■ Front Vise NC Auto-Index

- Minimal remnant
- Easy operation
- 16" index length
- NC back gauge



■ Up to 60° Degree Mitre

- Easy to turn head with roller bearing mechanism
- One touch locking mechanism




■ Easy Operation





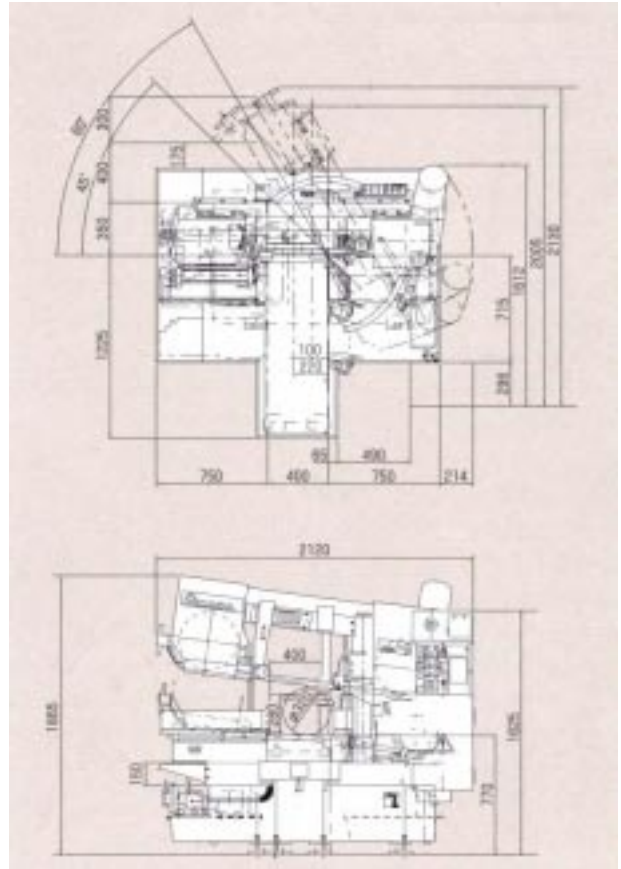

- Auto positioning for lower head position based on width of material
- Variable blade speed controlled by inverter
- Full stroke vise
- Light beam for precise material handling
- Diagnostic error message display



◆ DIMENSION



◆ SPECIFICATIONS

Cutting Capacity	0°		16" x 11"
			12.6"
	45°		8.7" x 11"
			8.7"
	60°		4" x 11"
			4"
Clamp Width		Rear Vise	Front Vise
	0°	0.8"-16"	0.8" - 16"
	45°	0 - 8"	
60°	0 - 4"		
Blade		1 1/4" x 0.042" x 12'9"	
Blade Speed (f/min)		99 - 330	
Motor	Blade	3HP	
	Hydraulic	1HP	
Index Stroke		16"	
Machine Weight		3,080 lbs.	
Machine Dimension		83.4" x 83.8" x 73.4"	

BAND SAWING MACHINE

HIKA-400

Versatile ♦ Fully Automatic ♦ Mitre Band Saw

